

FIG.1

FIG.2

FORMAT LANGUAGE PATTERN	MEANING
URL=<//	REJECT REQUEST HAVING TOP OF URL COINCIDENT WITH “/”
CGI==phf ARG=<Qname=root%OA	REJECT REQUEST HAVING CGI NAME OF “phf” AND TOP OF FACTOR OF CGI COINCIDENT WITH “Qname=root%OA”
URL<>..%.%.%..	REJECT REQUEST HAVING URL INCLUDING “..%.%.%..”
CGI>=.httr	REJECT REQUEST HAVING END OF CGI COINCIDENT WITH “.httr”, IE, REJECT REQUEST HAVING CGI WITH EXTENSION “.httr”

FIG.3


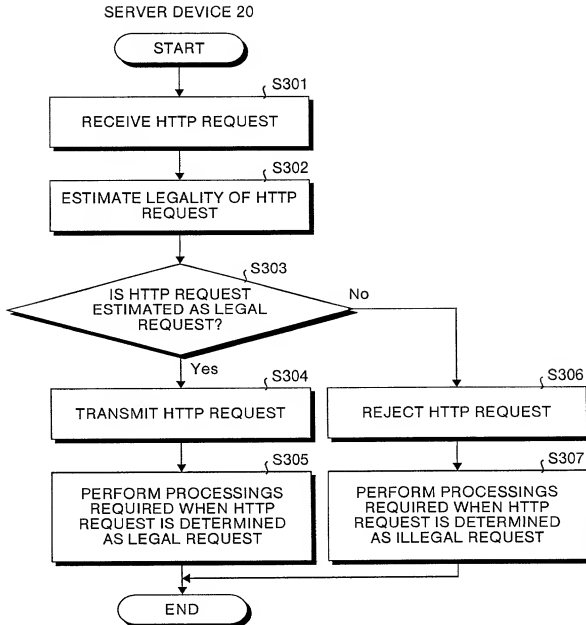


FIG.4

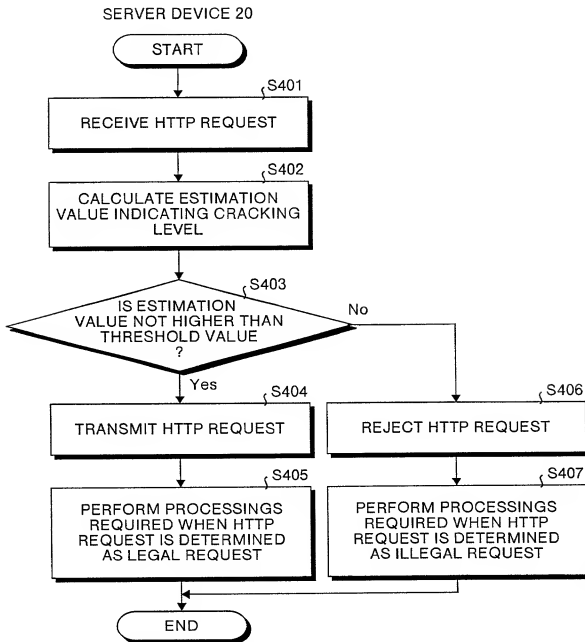

10087807.030502

FIG. 5

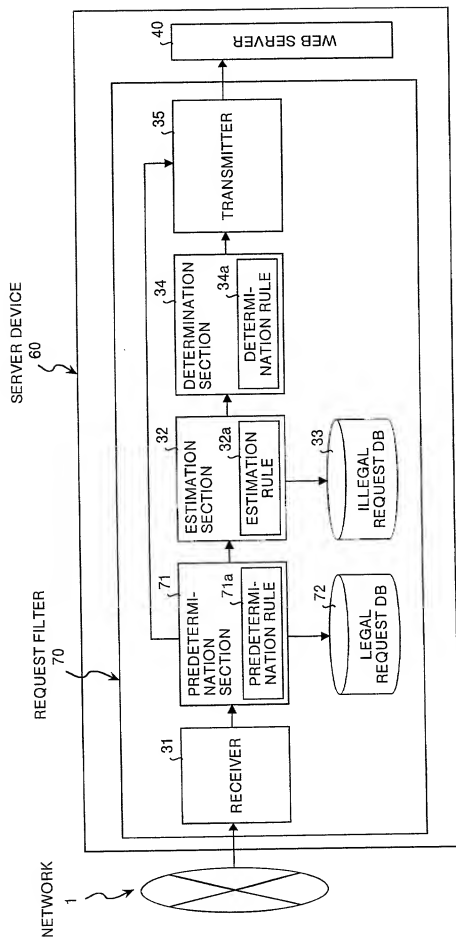


FIG.6

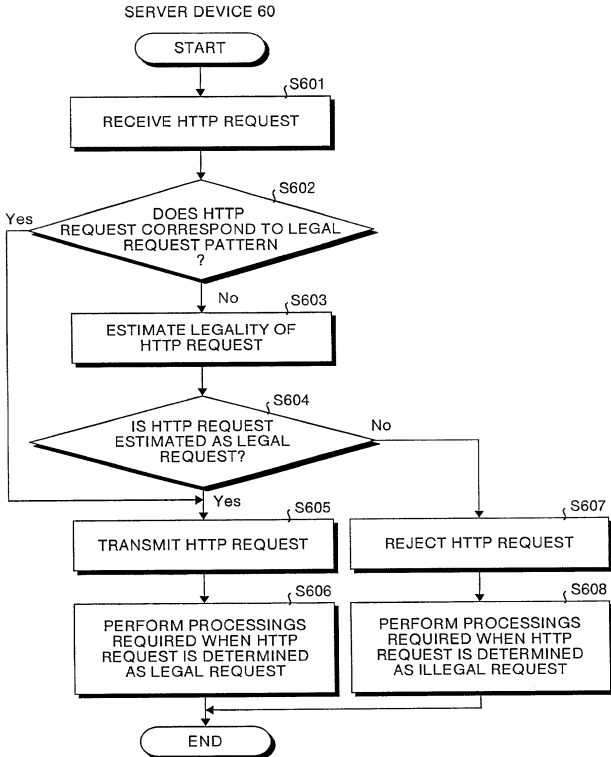


FIG. 7

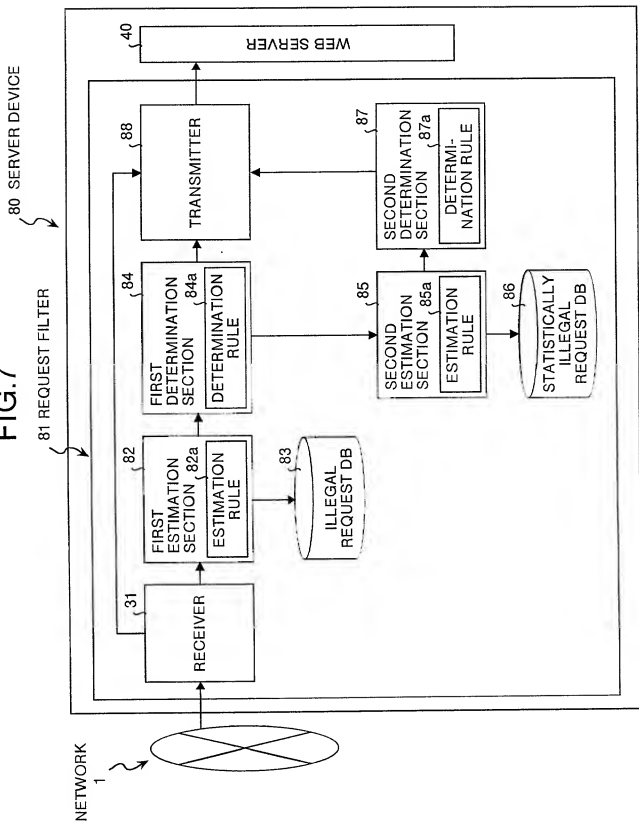


FIG.8




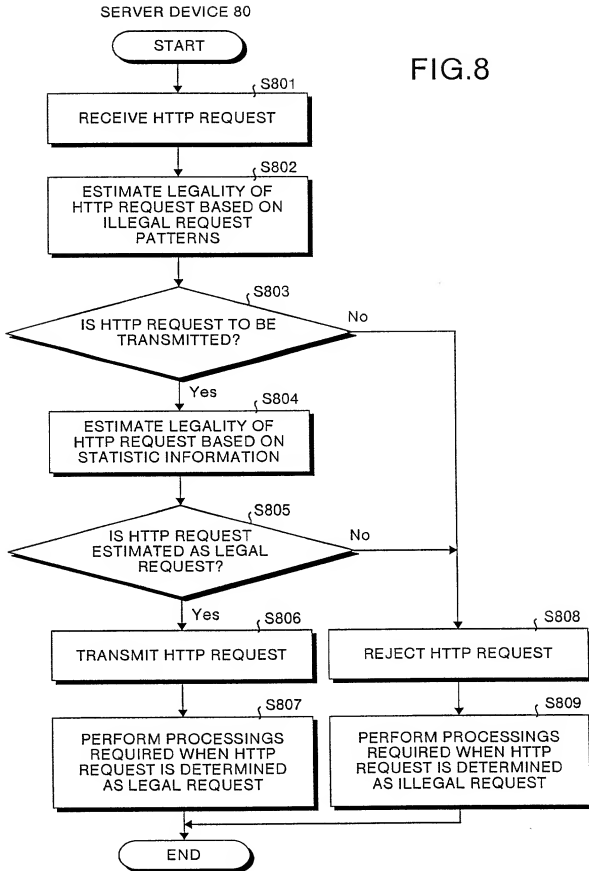





FIG.9

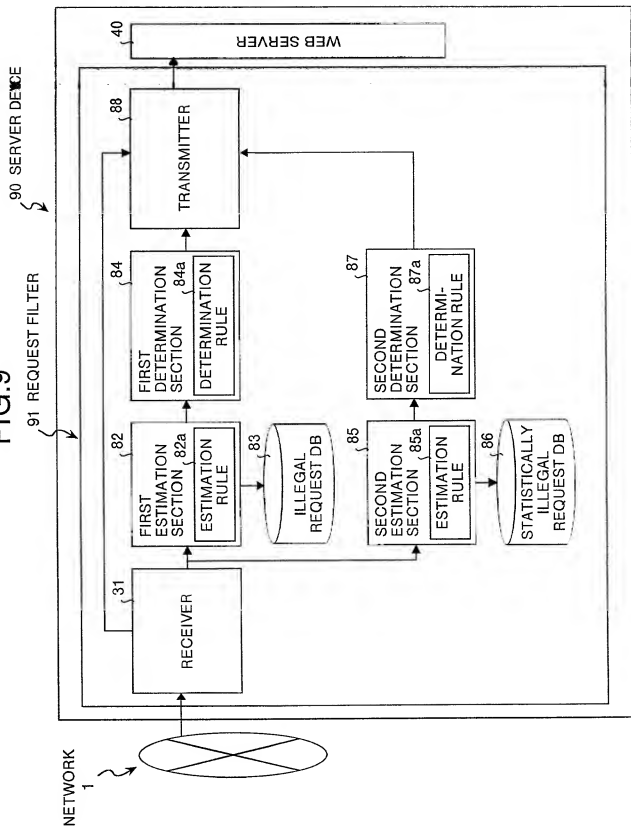

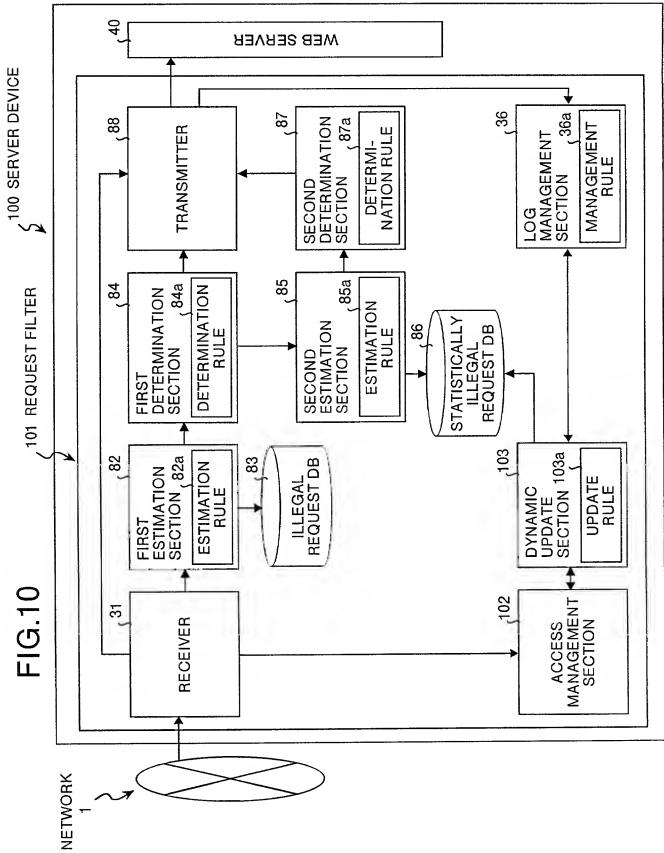

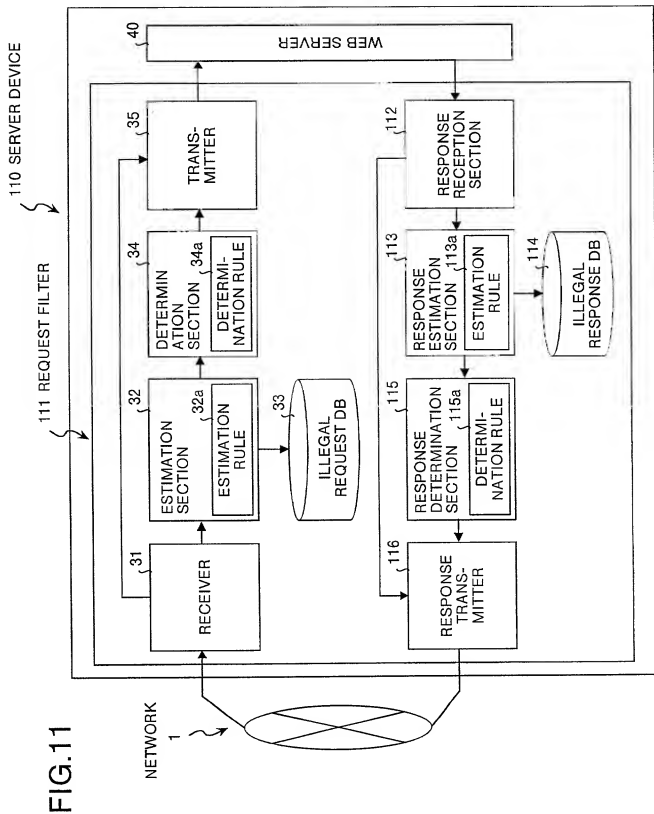

## SERVER DEVICE 110

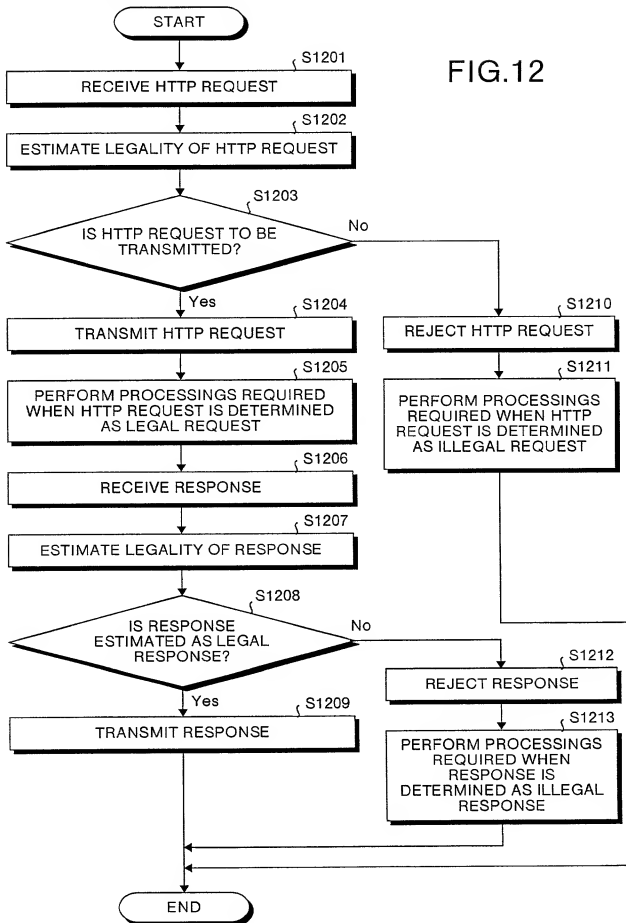


SERVER DEVICE

FIG. 13

REQUEST FILTER

121

120

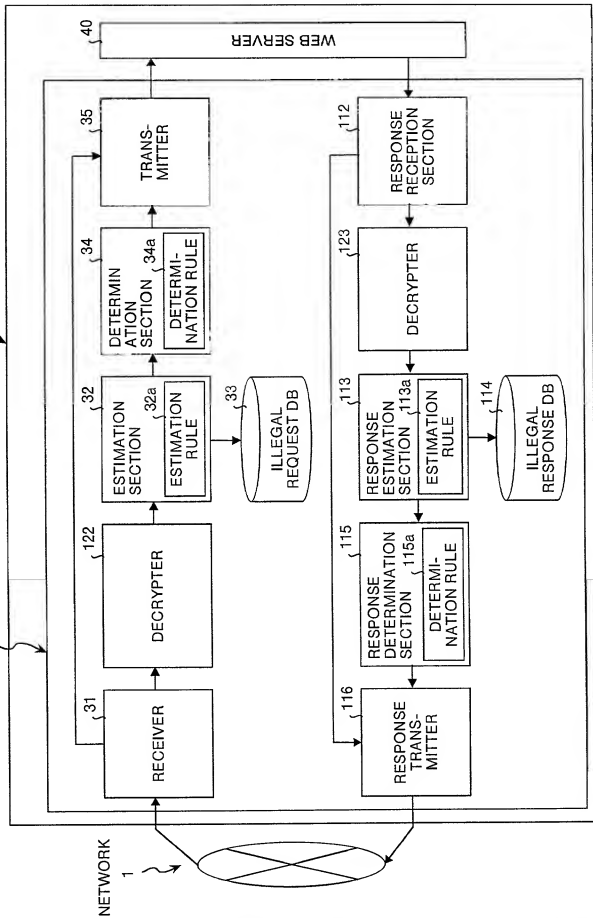

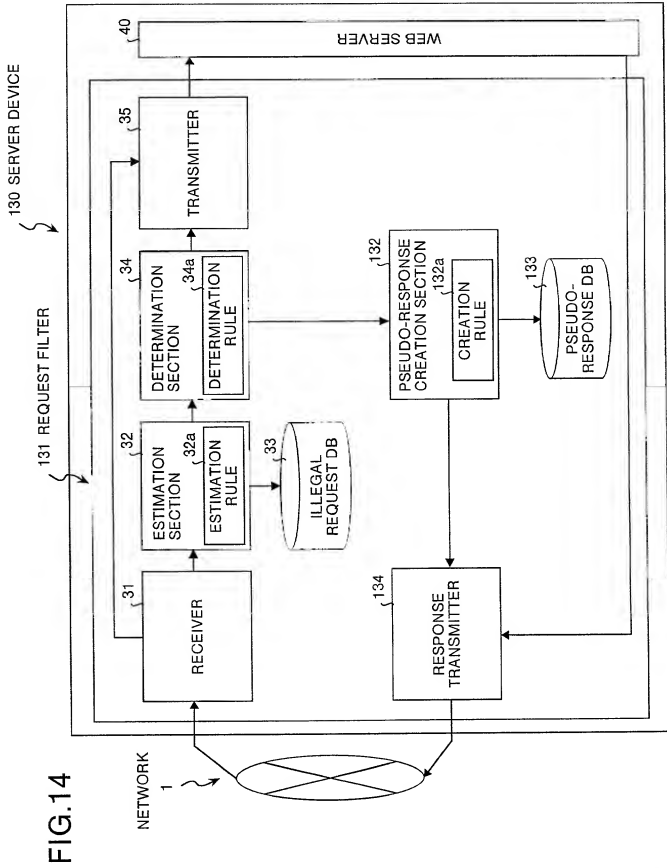


FIG.15

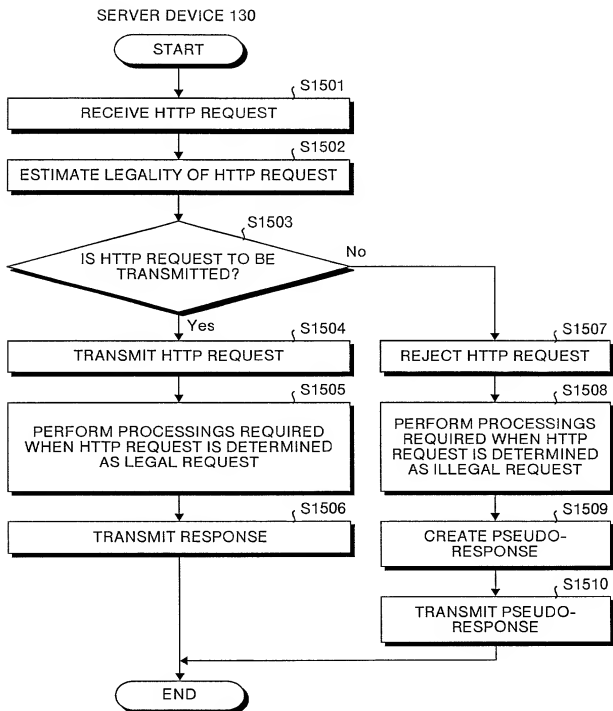


FIG.16

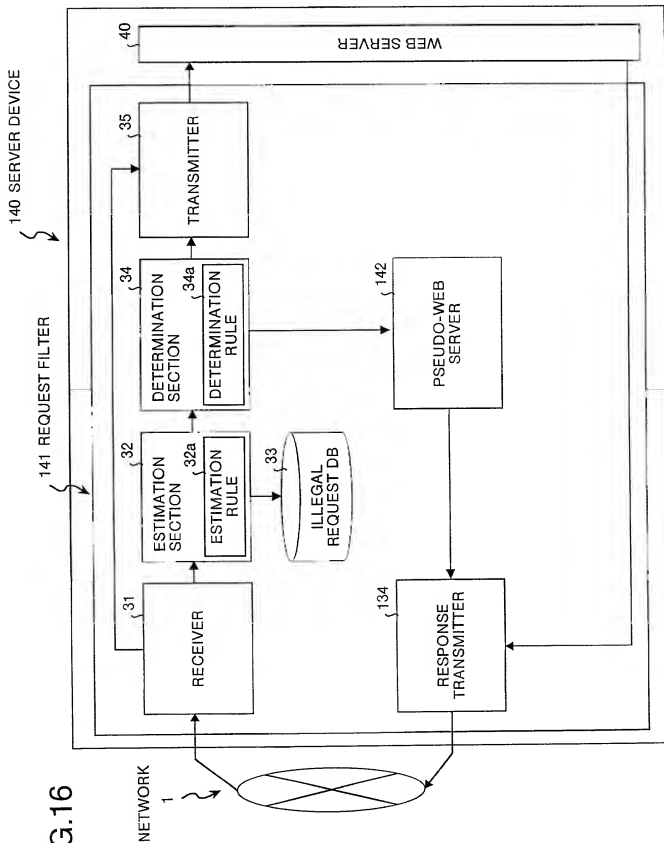
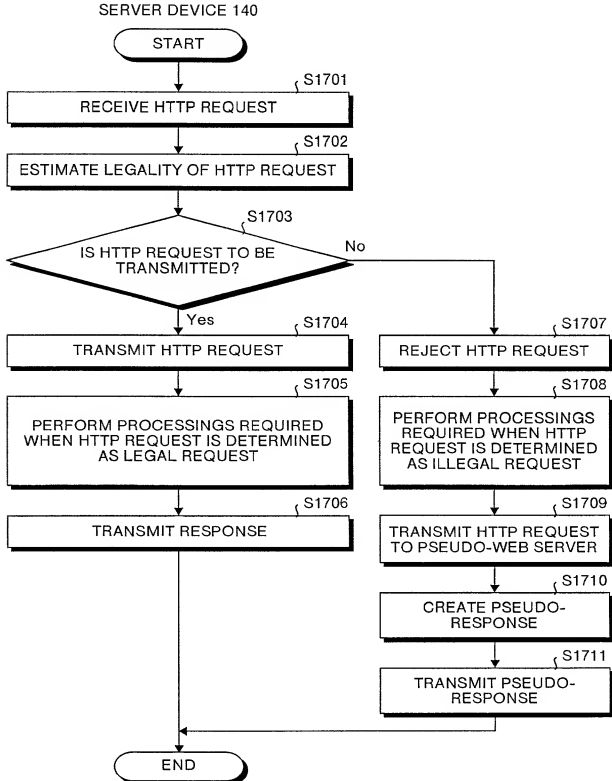
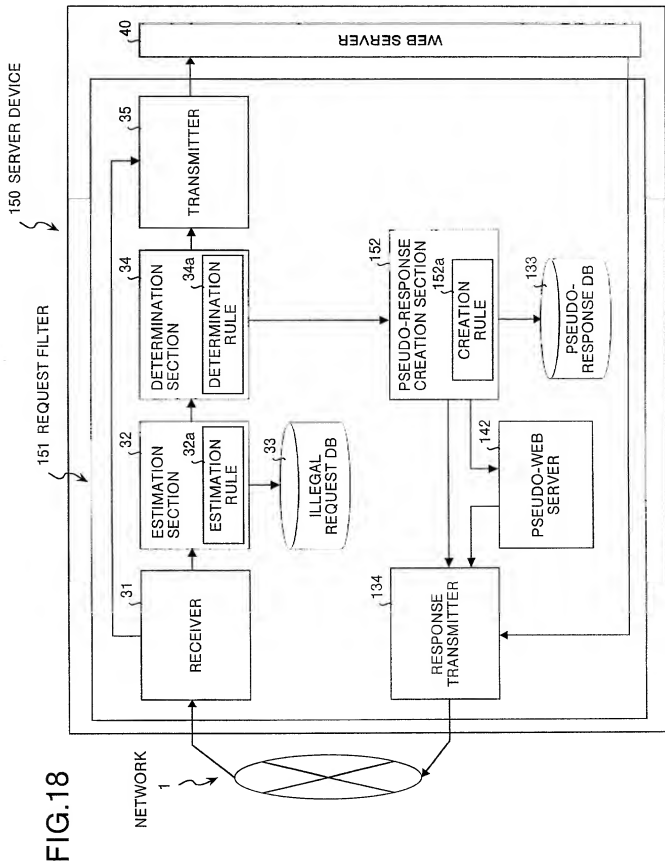




FIG.17





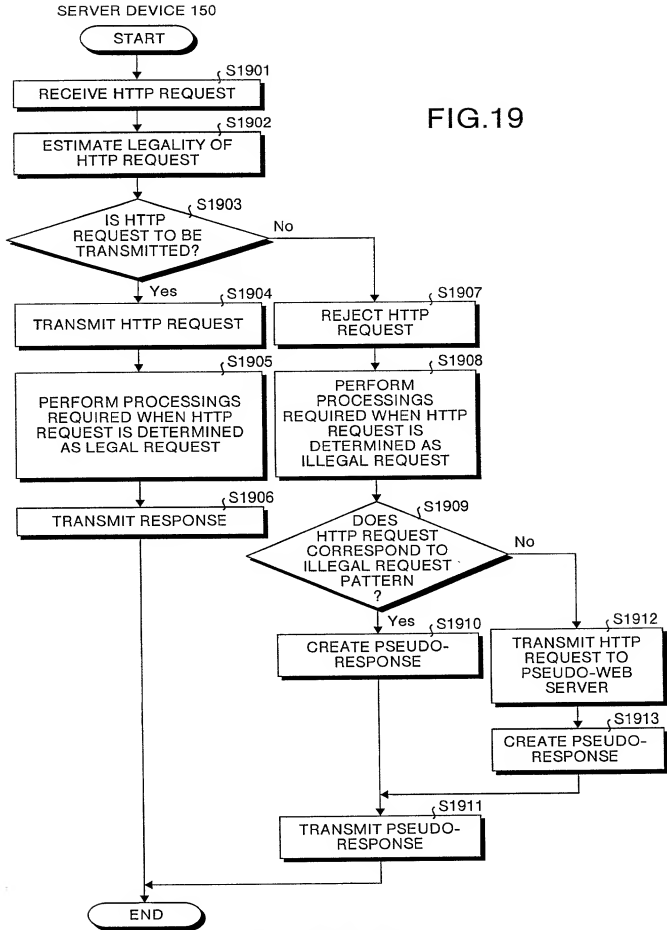


FIG.19

10087807.030502